
MARION COUNTY SURVEYOR'S OFFICE

SECTION CORNER RECORD

DEBRA S. JENKINS MARION COUNTY SURVEYOR SEC. 8 TWN. 14_N RNG. 4_E

BRYAN F. CATLIN, PLS TECHNICAL SUPERVISOR

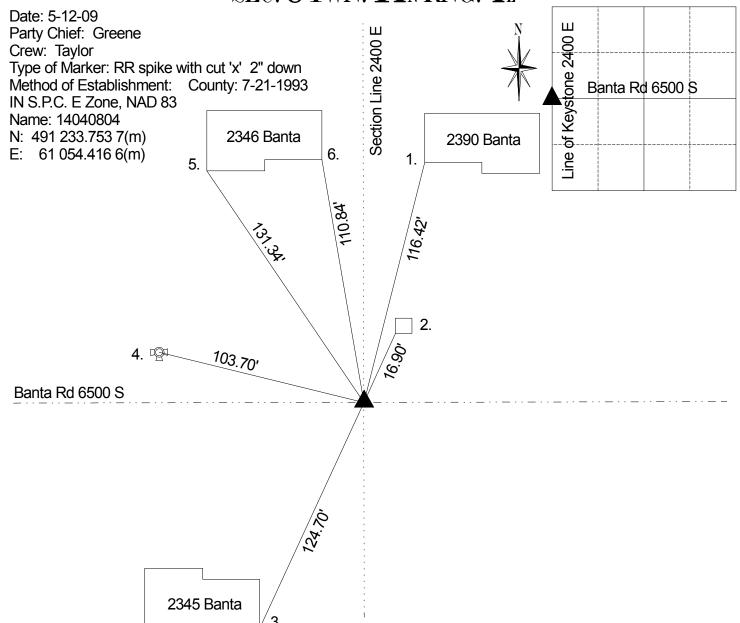

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 14" beech bearing N 61 E 19 links and a 12" cherry bearing N 79 W 24 links. (Marion County Atlas p. 9) A survey by D.H. Fatout on October 4, 1883 indicates a set rock with no witnesses. (Perry Legal Book p. 7) A survey by Paul Julian on May 16,1894 indicates a rock previously set. (Perry Legal Book p. 50) Corner referenced by Universaw on 8/3/1955 and called a RR spike. Corner referenced by Fortner on 8/23/74 and called a brass plug in concrete. Corner referenced by Gries on 6/24/87 and called a brass plug. Corner excavated on 7/21/93 by Wilcoxen and concrete was found but no sign of brass plug. A RR spike was set at surface. Corner referenced by Kiste on 7/29/1999 and called a RR spike. Corner referenced by Greene on 5/12/09 and called a RR spike 2" down.

REF.	DISTANCE	DESCRIPTION
1.	116.42'	SW corner 2390 Banta (stone)
2.	16.90'	SW storm inlet grate
3.	124.70'	SE 2345 Banta Garage 6' up
4.	103.70'	Top nut of fire hydrant
5.	131.34'	SW 2346 Banta Garage
6.	110.84'	SE 2346 Banta House